


# ELEMENTOS DE FIJACIÓN PARA MÁQUINA HERRAMIENTA

STANDARD CLAMPING ELEMENTS • ELÉMENTS DE BRIDAGE MECANIQÜÉS • ELEMENTOS DE FIXAÇÃO



2025

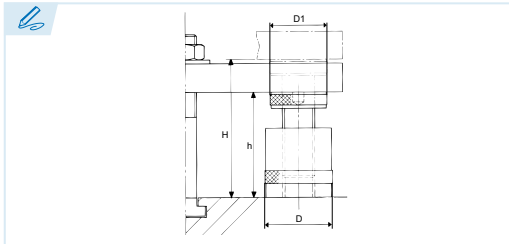

**Casquillo variable, rosca trapezoidal**  
Screw jack, trapezoidal thread  
Vérin de calage pas trapézoïdale  
Casquilho variável, rosca trapezoidal

**Acero fundido**  
Cast iron  
Fonte mécanique  
Aço fundido

**Husillo: Acero C45**  
Spindle: Steel C45  
Vis: Acier C45  
Fuso: Aço C45

**Acabado: Epoxi gris**  
Surface: Grey powder coated  
Finition: Epoxy gris  
Acabamento: Epóxi cinzento

ES EN FR PT

**Modelo** h - H **Altura mín. y máx.**  
Model Min. & max. height  
Modèle Hauteur mini et maxi  
Modelo Altura mín. e máx.

**Carga máxima (kN)**  
MAX (kN) Max. Load (kN)  
Capacité de charge (kN)  
Carga máxima (kN)

**Rosca trapezoidal autoblocante.**  
Self-locking trapezoidal thread.  
Filetage trapézoïdal autofreiné  
Rosca trapezoidal autoblocante.

**Husillo fabricado en acero bonificado con seguro de final de rosca.**  
Tempered steel screw with end stopbody.  
Filetage trapézoïdal autofreiné avec butée de sécurité de dévissage.  
Fuso fabricado em aço temperado com encravamento de final de rosca.

Ref.	Modelo	h - H	D	D1	MAX (kN)	gr.
2025-10	10	40 - 50	32	31	15	190
2025-20	20	42 - 52	50	50	60	550
2025-30	30	50 - 70	50	50	60	650
2025-40	40	70 - 100	50	50	60	900
2025-50	50	100 - 140	70	65	100	2.630
2025-60	60	140 - 210	80	70	170	4.600
2025-70	70	190 - 300	100	80	350	9.700
2025-80	80	140 - 200	100	80	350	6.900
2025-90	90	190 - 280	140	110	600	19.000

