

SOPORTE SERIE BAJA ESPIGA FIJA

Modelo FIJO	Zona Óptima Trabajo Kgs.	D m/m	H m/m	Ø Espiga	h m/m
000B	0-60	40	15	M-8	40
00B	30-100	63	18	M-10	83
0B	80-150	70	22	M-12	90
1B	100-350	90	25	M-12	90
2B	300-600	106	29	M-16	110
3B	500-900	127	33	M-16	110
4B	800-1.500	150	39	M-16	110
5B	1.300-2.000	170	42	M-16	110

RÓTULA

Modelo
Rótula


0BR
1BR
2BR
3BR
4BR
5BR

INOXIDABLE


Modelo
Inox. Goma

000 X
00X
0X
1X
2X
3X
4X
5X

Dureza - 65 Shore.

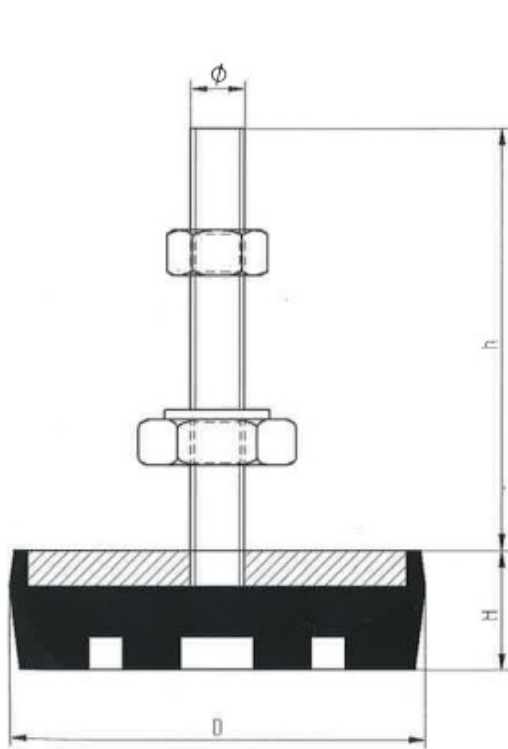

Fijo

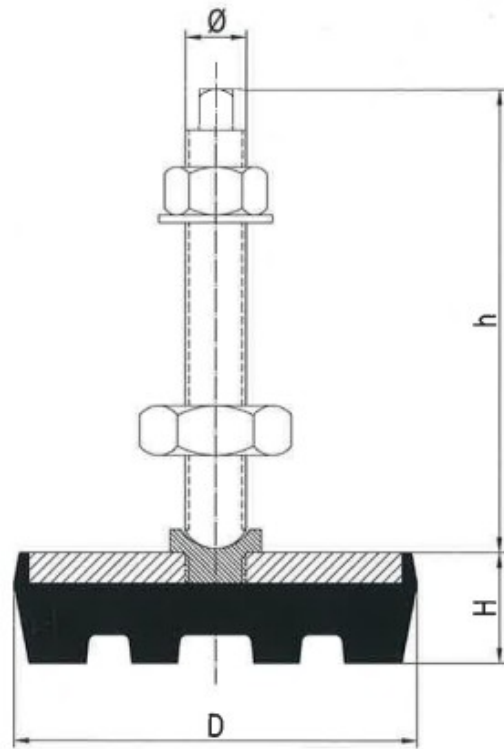

Rótula

